


Main cable junction terminal

HA 25-22

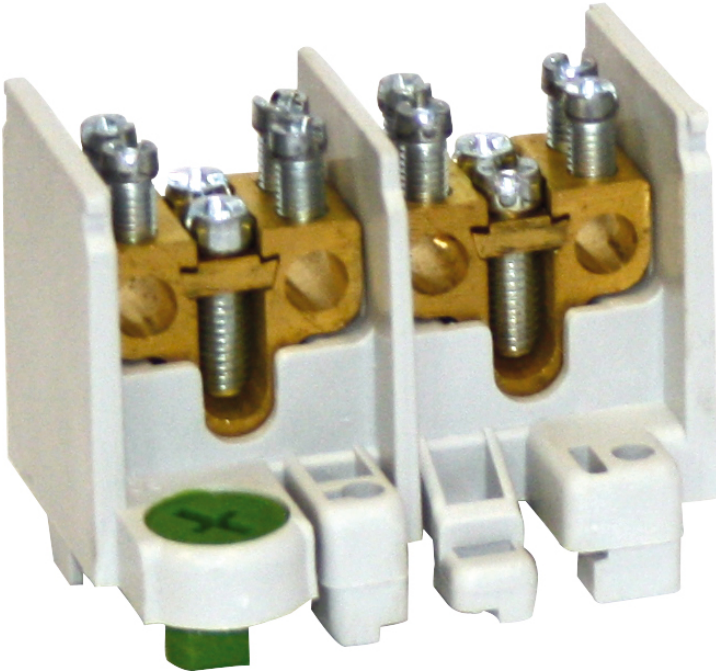

HA 25-22

Main cable junction terminal

Productnumber: 69122201

Dimensions: 157 x 50 x 58 mm

Main cable junction terminal with cross-sectional area 1x25 mm² per pole and 2 outlets 16 mm² per pole

2-pole - 25/16 mm²

Technical Data

electrical characteristics

| | |
|--|---------------------|
| Rated operating voltage AC: | 400 V |
| Number of poles: | 2 |
| Connection 1: Connection type: | Screws |
| Connection 1: Clamping points per pole: | 3 |
| Connection 1: Suitable for Cu conductors: | 1 |
| Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min): | 2.5 mm ² |
| Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max): | 16 mm ² |
| Connection 1: Connectable conductor cross-section, single-wire (min): | 1.5 mm ² |
| Connection 1: Connectable conductor cross-section, single-wire (max): | 25 mm ² |
| Connection 1: Connectable conductor cross-section, stranded (min): | 1.5 mm ² |
| Connection 1: Connectable conductor cross-section, stranded (max): | 25 mm ² |
| Connection 2: Connection type: | Screws |
| Connection 2: Suitable for Cu conductors: | 1 |
| Connection 2: Connectable conductor cross-section, fine-wire with ferrule (min): | 1.5 mm ² |
| Connection 2: Connectable conductor cross-section, fine-wire with ferrule (max): | 10 mm ² |
| Connection 2: Connectable conductor cross-section, single-wire (min): | 1.5 mm ² |
| Connection 2: Connectable conductor cross-section, single-wire (max): | 16 mm ² |
| Connection 2: Connectable conductor cross-section, stranded (min): | 1.5 mm ² |
| Connection 2: Connectable conductor cross-section, stranded (max): | 16 mm ² |

Dimensions

| | |
|---------|--------|
| Width: | 157 mm |
| Length: | 50 mm |
| Height: | 58 mm |

Material characteristics

| | |
|--|--------|
| Flammability class according with UL94: | V0 |
| Glow-wire flammability according to EN 60695-2-11: | 960 °C |
| Industry quality: | no |

mechanical properties

| | |
|----------------------------------|--------|
| Connection 1: Tightening moment: | 2.5 Nm |
| Connection 2: Tightening torque: | 2.5 Nm |

Material

| | |
|---------------------------|---------------|
| Insulating body material: | Thermoplastic |
|---------------------------|---------------|